


Non Rated & Fire Rated 20 Minute

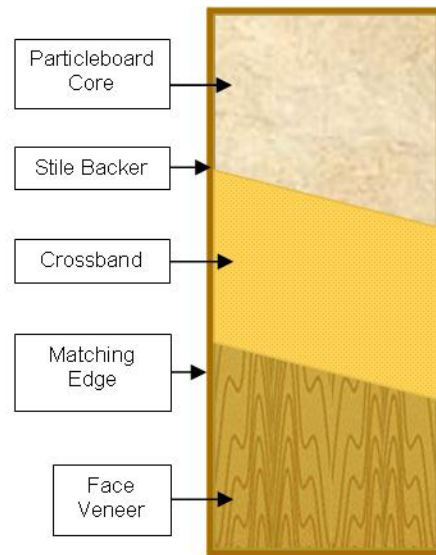

Product Features

Construction:	Bonded 5 Ply Hot Press		
Core:	Bonded Particleboard Core (conforming to ANSI A 208.1 1 LD-2)		
Door Thickness:	Non-rated	1 3/4", 1 3/8", 2 1/4" (other options avail.)	
	20 Minute	1 3/4", 1 3/8" (Max 3/0 x 7/0), 2 1/4"	
Maximum Size:	Single (non-rated)	5/0 x 12/0	
	Pair (non-rated)	10/0 x 12/0	
		<u>Neutral Pressure</u>	<u>Positive Pressure</u>
	Single (20 minute)	5/0 x 10/0	5/0 x 10/0
	Pair (20 minute) Std or Double Egress	10/0 x 10/0	10/0 x 10/0
	(20 minute Guardian Fire Label when Pair size exceeds 8/0 x 9/0)		
Stiles:	7/8" Matching outer, total 1 3/8" prior to factory trimming; (other options available)		
Top & Bottom Rails:	1 5/8" Mill Option (Wider rails available)		
Faces:	All Veneer Species, Medium Density Overlay (MDO), Plastic Laminate, HD Hardboard		
Veneer Matching:	Available in Pairs, Sets, & Transoms (special matching available)		
Crossbands:	High Density Fiberboard (HDF)		
Adhesives:	Type 1 (waterproof)		
Max Lite Openings:	20 Minute: (Requires approved lite kit)		
	Total sq. in. not to exceed 1296. Lite opening dimensions not to exceed 36" in width and 54" in length. (1 3/8" thick max. 100 total sq. in. 12" width 33" length, with MVF only.)		
Machining/Finishing:	Prefit, Bevel, & complete Factory Machining and Factory UV Finishing available		
Warranty:	Limited Lifetime up to 4/0 x 10/0 - <i>Warranty does not apply for exterior applications</i>		
Labeling Approvals:	Intertek Testing Services/Warnock Hersey, Guardian Fire Testing Laboratories		
Specifications:	Meets WDMA & AWI quality standards		
Environmental/LEED Options:	MR4-Recycled Content/MR5-Regional Materials/MR6-Rapidly Renewable Materials/MR7-Certified Wood/IEQ4.4-Low-Emitting Materials (No added Urea Formaldehyde Resins)		