


Non-Rated/20 Minute Fire Rated

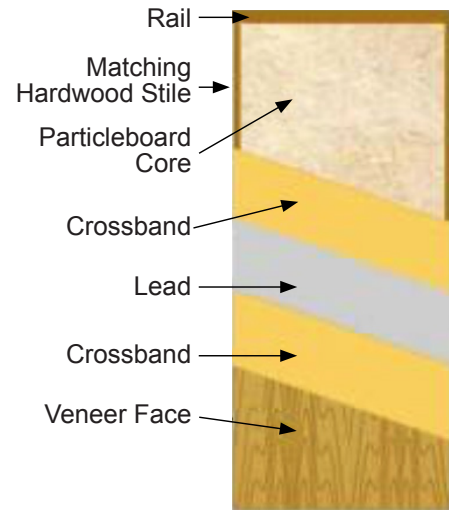

Product Features

Construction:	Fully bonded core – lead under skin both sides		
Core:	Bonded particleboard core (conforming to ANSI A 208.1 1 LD-2) or Structural Composite Lumber Core. (based on door size)		
Door Thickness:	Non-rated	1 3/4” – 2 1/4”	
	20 Minute	1 3/4” – 2 1/4”	
Maximum Size:	Single (non-rated)	5/0 x 12/0	
	Pair (non-rated)	10/0 x 12/0	
		<u>Neutral Pressure</u>	<u>Positive Pressure</u>
	Single (20 minute)	5/0 x 10/0	5/0 x 10/0
	Pair (20 minute)	8/0 x 8/0	8/0 x 8/0
Stiles:	1 3/8” or 6” SCL with 7/8” matching hardwood outers prior to factory trimming. Construction based on door size and core. (other options available)		
Top & Bottom Rails:	6” SCL (wider rails available)		
Faces:	All veneer species, medium density overlay (MDO), plastic laminate		
Veneer Matching:	Available in pairs, sets, & transoms (special matching available)		
Crossbands:	High Density Fiberboard (HDF)		
Adhesives:	Type 1 (waterproof)		
Max Lite Openings:	<u>Non-rated:</u> Contact Sales for limitations		
	<u>20 Minute:</u> Metal Vision Frames: (Requires approved lead glass and rated glass)		
	Total area of openings not to exceed 1296 sq. in.		
Machining/Finishing:	Prefit, bevel, & complete factory machining and factory UV finishing available		
Warranty:	Limited Lifetime up to 4/0x8/0. <i>Warranty does not apply for exterior applications</i>		
Specifications:	Meets WDMA & AWI quality standards (contact sales for label approvals)		
Environmental/LEED Options:	MR4-Recycled content/MR6-Rapidly renewable/IEQ4.4-Low-emitting materials (no added urea formaldehyde resins)		