


Non-Rated & Fire Rated 20 Minute

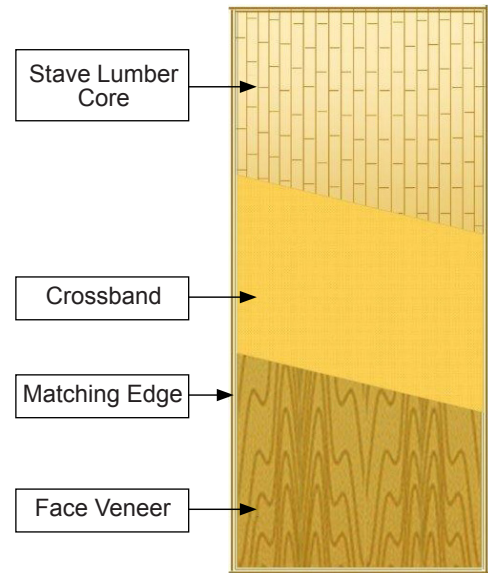

Product Features

| | | | |
|------------------------------------|--|---|--------------------------|
| Construction: | Bonded 5 Ply Hot Press | | |
| Core: | Lumber Core (butt-jointed & glued block) | | |
| Door Thickness: | Non-rated | 1 3/4", 1 3/8", 2 1/4" (other options avail.) | |
| | 20 Minute | 1 3/4", 2 1/4" | |
| Maximum Size: | Single (non-rated) | 4/0 x 8/0 | |
| | Pair (non-rated) | 8/0 x 8/0 | |
| | | <u>Neutral Pressure</u> | <u>Positive Pressure</u> |
| | Single (20 minute) | 4/0 x 8/0 | 4/0 x 8/0 |
| | Pair (20 minute) Std or Double Egress | 8/0 x 8/0 | 8/0 x 8/0 |
| Stiles: | 7/8" Matching outer, total 1 3/8" prior to factory trimming (other options available) | | |
| Top & Bottom Rails: | 1 1/2" Mill Option (Wider rails available) | | |
| Faces: | All Veneer Species, Medium Density Overlay (MDO), Plastic Laminate, HD Hardboard | | |
| Veneer Matching: | Available in Pairs, Sets, & Transoms (special matching available) | | |
| Crossbands: | High Density Fiberboard (HDF) | | |
| Adhesives: | Type 1 (waterproof) | | |
| Max Lite Openings: | 20 Minute: (Requires approved lite kit) | | |
| | Total sq. in. not to exceed 1296. Lite opening dimensions not to exceed 36" in width and 54" in length. (1 3/8" thick max. 100 total sq. in. 12" width, 33" length, with MVF only) | | |
| Machining/Finishing: | Prefit, Bevel, & complete Factory Machining and Factory UV Finishing available | | |
| Warranty: | N/A | | |
| Labeling Approvals: | Intertek Testing Service/Warnock Hersey | | |
| Specifications: | Meets WDMA & AWI quality standards (Contact sales for label approvals) | | |
| Environmental/LEED Options: | MR4-Recycled Content/MR6-Rapidly Renewable Materials/MR7-Certified Wood/IEQ4.4-Low-Emitting Materials (No added Urea Formaldehyde Resins) | | |