




# Structural Composite Lumber Core

A great name in doors since 1940

## Non-Rated & Fire Rated 20 Minute

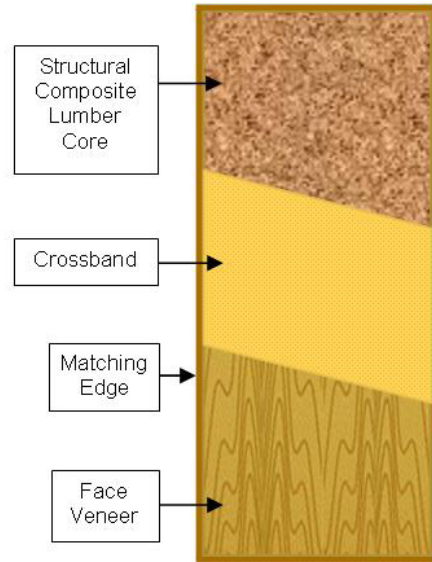

### Product Features

<b>Construction:</b>	Bonded 5 Ply Hot Press		
<b>Core:</b>	Structural Composite Lumber Core		
<b>Door Thickness:</b>	Non-rated	1 3/4", 1 3/8", 2 1/4" (other options avail.)	
	20 Minute	1 3/4", 2 1/4"	
<b>Maximum Size:</b>	Single (non-rated)	5/0 x 12/0	
	Pair (non-rated)	10/0 x 12/0	
		<u>Neutral Pressure</u>	<u>Positive Pressure</u>
	Single (20 minute)	5/0 x 10/0	5/0 x 10/0
	Pair (20 minute) Std or Double Egress	10/0 x 10/0	10/0 x 10/0
<b>Stiles:</b>	7/8" Matching outer, total 1 3/8" prior to factory trimming; (other options available)		
<b>Top &amp; Bottom Rails:</b>	Structural Composite Lumber (SCL)		
<b>Faces:</b>	All Veneer Species, Medium Density Overlay (MDO), Plastic Laminate, HD Hardboard		
<b>Veneer Matching:</b>	Available in Pairs, Sets, & Transoms (special matching available)		
<b>Crossbands:</b>	High Density Fiberboard (HDF)		
<b>Adhesives:</b>	Type 1 (waterproof)		
<b>Max Lite Openings:</b>	Non-rated: 5" Top Rail, 5" Stiles, & 8" Bottom Rail		
	20 Minute: (Requires approved lite kit) Total sq. in. not to exceed 2835. Lite opening dimensions not to exceed 36" in width and 54" in length, or 34" in width, if over 81" in length. (1 3/8" thick max. 100 total sq. in. 12" width, 33" length, with MVF only.)		
<b>Machining/Finishing:</b>	Prefit, Bevel, & complete Factory Machining and Factory UV Finishing available		
<b>Warranty:</b>	Limited Lifetime up to 4/0x10/0. <i>Warranty does not apply for exterior applications</i>		
<b>Labeling Approvals:</b>	Intertek Testing Services/Warnock Hersey, Guardian Fire Testing Laboratories		
<b>Specifications:</b>	Meets WDMA & AWI quality standards (Contact sales for label approvals)		
<b>Environmental/LEED Options:</b>	MR4-Recycled Content/MR6-Rapidly Renewable Materials/MR7-Certified Wood/IEQ4.4-Low-Emitting Materials (No added Urea Formaldehyde Resins)		