


Structural Composite Lumber Core Bolted Center Lead Door

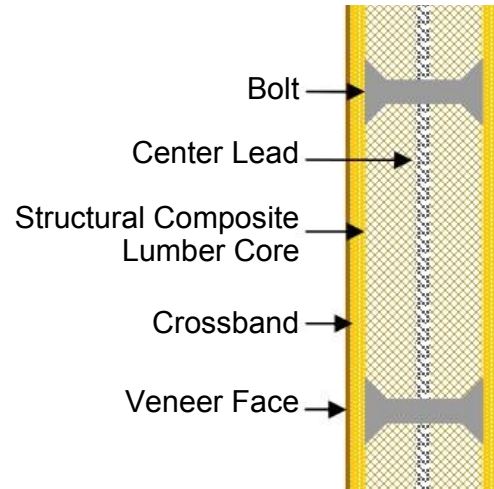

Product Features

Construction:	Fully bonded and bolted center lead. Our standard construction for lead thickness greater than 1/4" (available on thinner lead if requested)	
Core:	Structural composite lumber core	
Door Thickness:	<u>Lead Thickness</u>	<u>Door Thickness</u>
	Over 3/8 to 15/32	2 1/4
	Up to 1/2	2 1/2
	(other lead and door thicknesses available upon request)	
Maximum Size:	Single (non-rated)	4/0 x 8/0
	Pair (non-rated)	8/0 x 8/0
Lead:	Bolted to core 2" from edge of door & 8" on center (locations vary based on hardware)	
Stiles:	7/8" matching hardwood prior to factory trimming (other options available)	
Faces:	All veneer species, medium density overlay (MDO), plastic laminate	
Veneer Matching:	Available in pairs, sets, & transoms (special matching available)	
Crossbands:	High Density Fiberboard (HDF)	
Adhesives:	Type 1 (waterproof)	
Max Lite Openings:	<u>Non-rated:</u> Total sq. in. not to exceed 40% of the surface area of the door, with a maximum length not exceeding 50% of the height of the door.	
Machining/Finishing:	Prefit, bevel, & complete factory machining and factory finishing available	
Warranty:	N/A	
Specifications:	Meets WDMA & AWI quality standards (contact sales for label approvals)	
Environmental/LEED Options:	MR4-Recycled content/MR6-Rapidly renewable/IEQ4.4-Low-emitting materials (no added urea formaldehyde resins)	