


Fire Rated SafeCore® – Positive Pressure (Cat. A)

Positive Pressure with Concealed Intumescent

• Fire Rated 45 / 60 / 90 Minute

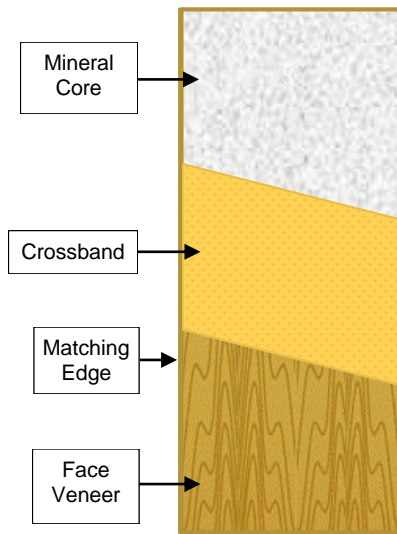

Fire Safe Products

STREK•O

A great name in doors since 1940

Product Features

Construction:	Bonded 5 Ply Hot Press		
Core:	Asbestos-Free Incombustible Mineral (Blocking Available)		
Door Thickness:	45 / 60 / 90 Minute		1 3/4”
Maximum Size:	Single	4/0 x 8/0	
	Single 45 Minute	5/0 x 8/0	
	Standard Pair	8/0 x 8/0 (Require special construction)	
Stiles: (Wider Stiles Available)	Concealed intumescent positive pressure stiles with maximum 15/32” matching hardwood edge		
	Single: 2-3/16”	Pairs:	Meeting Edge: 5-1/2” Hinge Edges: 2-3/16”
Top & Bottom Rails: (Wider Rails Available)	Concealed intumescent top rail with maximum 1/4” wood allowed on top rail and bottom rail (1/2” maximum wood allowed on bottom rail of SFD-45PPA)		
	Single:	Top: 2-5/8”	Bottom: 2-3/8”
	Pair:	Top: 2-5/8”	Bottom: 2-3/8”
Faces:	All Veneer Species, Medium Density Overlay (MDO), Plastic Laminate		
Veneer Matching:	Available in Pairs, Sets & Transoms (special matching available)		
Crossbands:	High Density Fiberboard (HDF)		
Adhesives:	Type 1 (Waterproof)		
Max Lite Openings:	<u>Metal Vision Frames:</u> (Requires approved glass) Total area of openings not to exceed 1296 sq. in. of visible glass or one continuous dimension of 36” in width or 54” in height		
Machining/Finishing:	Prefit, Bevel & complete Factory Machining and Factory UV Finishing available		
Warranty:	Life of Original Installation - <i>Warranty does not apply for exterior applications</i>		
Labeling Approvals:	Intertek Testing Services/Warnock Hersey		
Specifications:	Meets WDMA & AWI Quality Standards (Contact sales for label approvals)		
Environmental/LEED Options:	MR4-Recycled Content/MR6-Rapidly Renewable Materials/MR7-Certified Wood/IEQ4.4-Low-Emitting Materials (No added Urea Formaldehyde Resins)		